



8'W x 8'H

DOCK SEALS

Combines the Advantages of Low Cost and Excellent Sealing Action

- Built for an 8'W x 8'H (series **D-150**) or 8'W x 9'H (series **D-350**) Door Opening
- Projections available from 10" to 20" in 1" increments
- Consists of Three Pieces:
 - (1) Header (top) - 12"H x 120"L
 - (2) Verticals (sides) - 108"H x 12"W
- 36 ounce Nylon Reinforced Vinyl Facing
- 5" Compression Recommended



8'W x 10'H

DOCK SEAL/SHELTERS

Combines the Effective Sealing Action of the Dock Seals with the Full Height Access Advantage of Dock Shelters

- Built for an 8'W x 10'H (series **D-150/650**) Door Opening
- Projections from 10" to 20" in 1" increments
- Consists of Three Pieces:
 - (1) Header (top) - 30"H x 114"L
 - (2) Verticals (sides) - 126"H x 12"W
- 36 ounce Nylon Reinforced Vinyl Facing
- 5" Compression Recommended



8'W x 8'H to 10'W x 10'H

DOCK SHELTERS

Provides Full Height and Width Access to the Rear of the Trailer

- Built for an 8'W x 8'H to 8'W x 10'H (series **D-750**) Door Opening
- Projections available 18", 24", 30" & 36"
- Includes Steel Channel Guide Protection
- Dock Height Draft Pads
- 40 ounce Nylon Reinforced Vinyl Flap Assembly and 22 ounce Translucent Vinyl Covered Sides
- 10" Extension Past Dock Bumpers Recommended



8'W x 8'H to 10'W x 10'H

RETRACTING DOCK SHELTER

No Guide Protectors Needed - Spring Loaded to Protect Trailer Damage

- Built for an 8'W x 8'H to 10'W x 10'H (model **D-520-24**) Door Opening
- Projection 24"
- 40 ounce Nylon Flap Assembly with Reinforced Armor Pleats on the High Wear Area
- Shelter Extends 6" Vertically when Collapsed

Immediately reduce your heating and cooling costs drastically. Seals and Shelters also increase morale, security and safety by keeping the dock area comfortable and dry.

OPTIONS

Enhance the Serviceability and Durability of your Seal or Shelter with the following options:

- Full Height Pleats with Full Height Guide Stripes, model **D-FHPFS**
- Full Height Pleats with Standard Guide Stripes, model **D-FHPS**
- Armor Pleats, Top 24", model **D-AP**
- 54 Ounce Material - Face Only, model **D-54oz**
- 18" High Header, model **D-18H**
- Sloped Verticals, model **D-SV**
- Bottom Bun, model **D-BBF**
- Bottom Bun with Bumpers, model **D-BBFB**
- Full Height Guide Stripes, model **D-GS**
- 12" Header Flap, model **D-12F**

ACCESSORIES



Loading Dock Lights




Laminated Dock Bumpers




Dock Traffic System

ARCHITECTURAL SPECIFICATIONS AND DRAWINGS

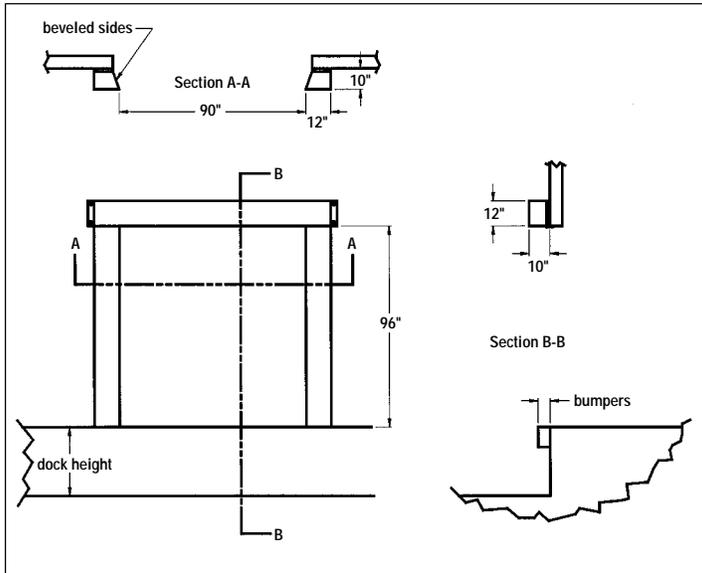


DOCK SEALS • series D-150

Truck Dock Seal shall be Model D-150-XX. The Seal will be built to fit a door opening 8 foot wide by 8 foot high. Shall consist of 3 pieces: Header (top) - 12 inches high by 120" overall length (foam is 114" allowing 3" each end for mounting), with ____ inch projection (total projection shall be 5" beyond dock bumper). Verticals (sides) - 96" high by 12" wide at truck face then beveled back to 9-1/2" at wall. Covering shall be 36 ounce nylon reinforced facing. Color to be black. Manufacturer to supply 8 predrilled steel brackets and 16 lag bolts. Dock Seal header to be mounted and bonded on 2" x 12" treated lumber. Dock Seal verticals to be mounted and bonded to 2" x 10" treated lumber.

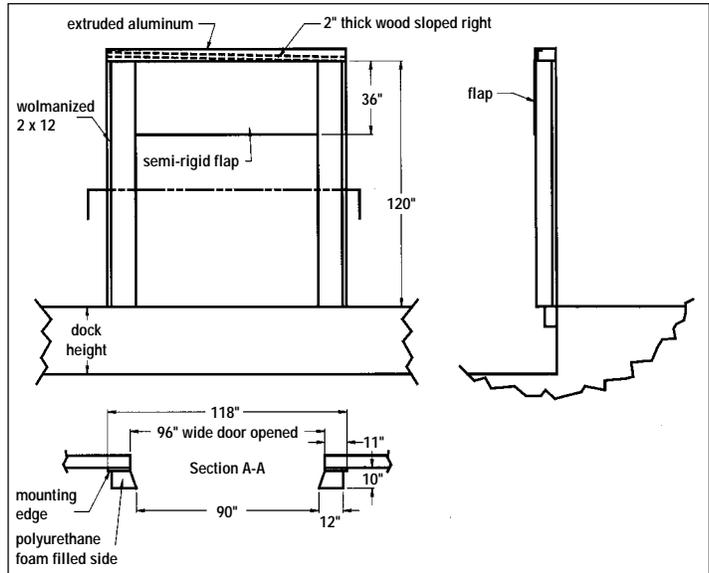


DOCK SEAL/SHELTER • series D-150/650

Truck Dock Seal/Shelter shall be Model D-150/650-XX. This unit will be built to fit a door opening 8 foot wide by 10 foot high. Shall consist of 3 pieces: Header (top) - to be sloped treated lumber with aluminum trim. Header Curtain to have a 30" drop. Verticals (sides) - 120" high by 12" wide at truck face then beveled back to 9-1/2", but mounted to 2" x 12" at the wall to allow 2-1/2" of mounting wood down the length of the seal. Covering shall be 36 ounce nylon reinforced facing. Color to be black. The verticals are not be compressed more than 5".

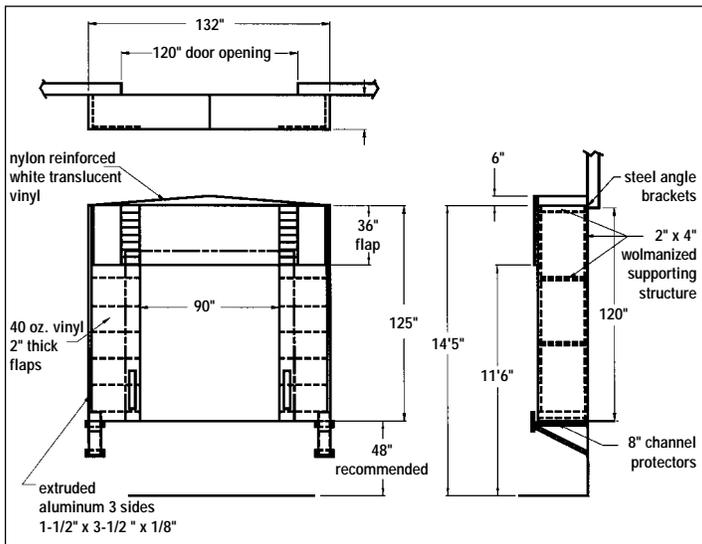

DOCK SHELTER • series D-750

Truck Dock Shelter shall be Model D-750-XX. The shelter will be built to fit a door opening 10 foot wide by 10 foot high. The vertical pieces (2) shall measure 126" high and close the door opening to 90" between heavy duty flaps. The header shall measure 132"W and 6"H with a 36" drop curtain. The flap assembly is constructed of 40 ounce black vinyl coated nylon. Outside perimeter covering is 22 ounce white translucent vinyl. Complete structure consists of 2" x 4" treated lumber. Protective aluminum trim covers the projected perimeter. Package includes (2) filler pads and (2) steel channel guide protectors, painted safety yellow. Installer shall supply mounting hardware according to building type.

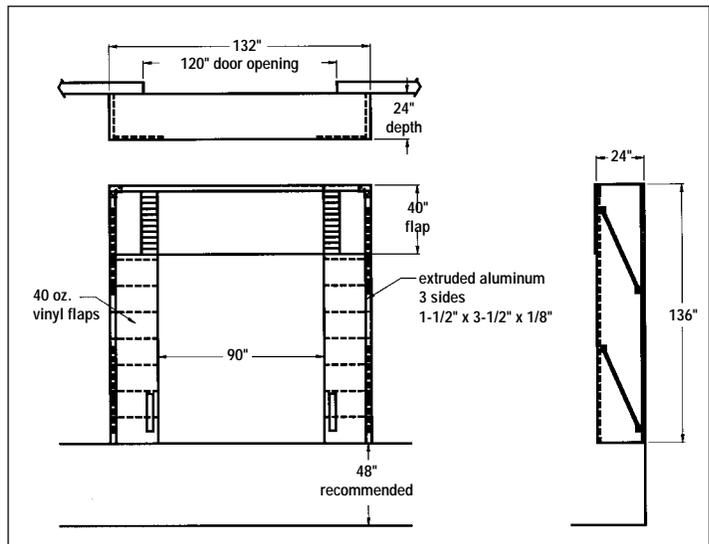

RETRACTABLE DOCK SHELTER • series D-520

Truck Retractable Dock Shelter shall be model D-520-24. This unit will be built to fit up to a 10 foot wide by 10 foot high door. The overall size of the shelter shall be 132" wide by 136" tall by 24" projection. Additional 6" height clearance is necessary when shelter is collapsed. The flaps shall be constructed of 40 ounce reinforced vinyl with sewn in stays and wear pleats. The flaps shall close the door opening down to 90" by 90". The frame shall consist of powder coated steel tubing designed to retract by direct force of a foreign object to prevent damage to the structure. Retractable Dock Shelter shall be assembled using hardware provided and mounted to building (hardware not included) by the installer.

DISTRIBUTED BY: